

www.heper.eu



# HANDRA

## HANDRAIL LIGHTING

2018-MNLGHT-270214.45  
Printed on 27.02.2018

\*Heper withholds the right to make modifications on  
declared information without prior notice.

HPR Pazarlama A.Ş.  
1. Organize Sanayi Bölgesi Uygurlar Cad. No:1 Sincan (06935), Ankara, Türkiye  
T: +90 312 267 54 30 (pbx)  
F: +90 312 267 54 31  
E: info@heper.eu  
W: www.heper.eu

heper<sup>+</sup>

# HANDRA




## TECHNICAL SPECIFICATIONS



### GENERAL HIGHLIGHTS

- Forward or Side throw light distribution
- Special reflector technology
- Operating temperature: -40°C / +55°C
- CRI > 70(4000K) , CRI > 80(3000K)
- Insulation Class: CLASS II
- Lumen depreciation: L90B50 > 84700 h
- Corrosion resistant aluminum housing
- Electrostatic powder coating

CE EN60598, IP66, IK08

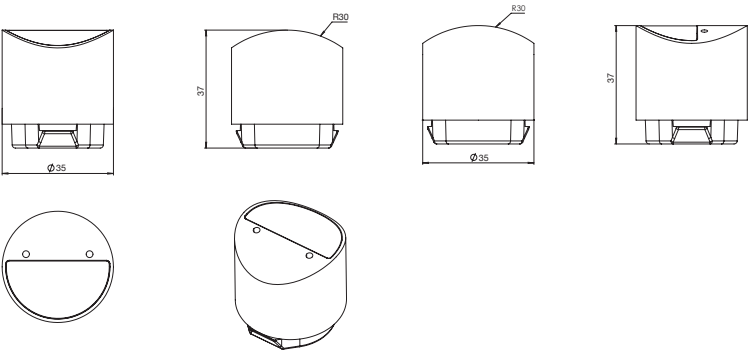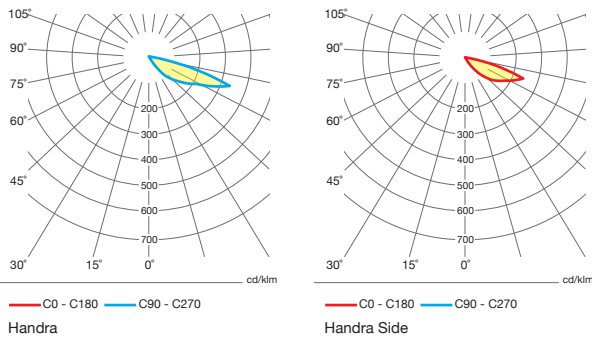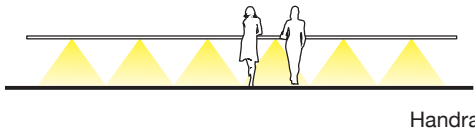

| CODE       | DESCRIPTION | CCT            | DRIVE CURRENT | LUMEN OUTPUT   | POWER |
|------------|-------------|----------------|---------------|----------------|-------|
| LH5002.545 | Handra      | 3000K<br>4000K | 350mA         | 118lm<br>125lm | 2W    |
| LH5003.545 | Handra Side | 3000K<br>4000K | 350mA         | 100lm<br>105lm | 2W    |

