


www.heper.eu

REGIO

STADIUM LIGHTING

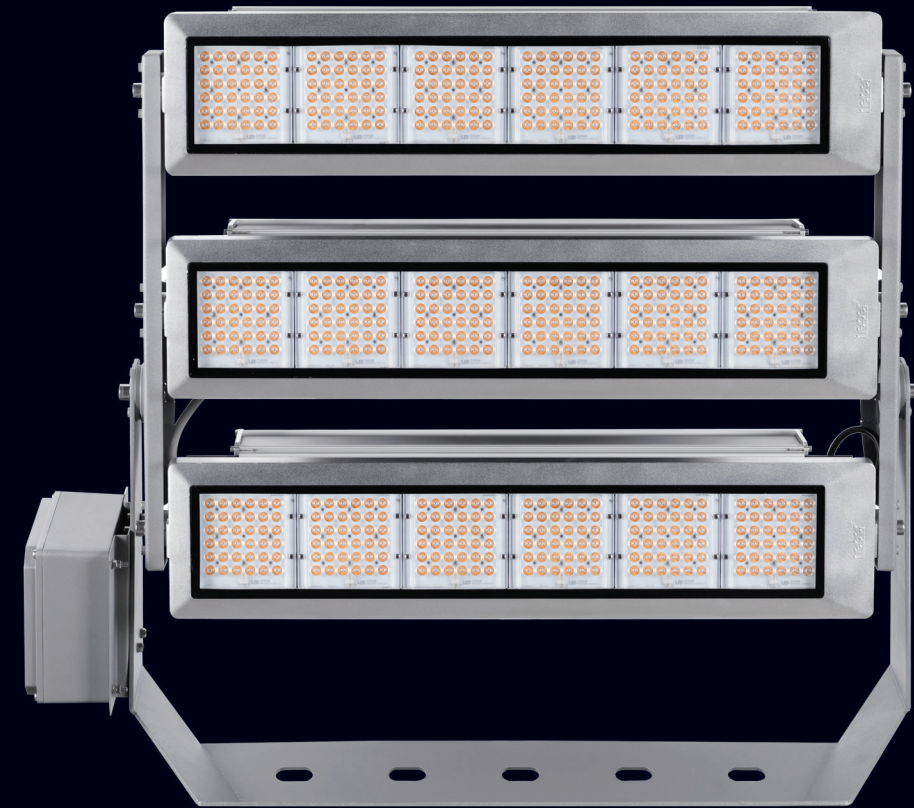

2018-MNLGHT-270214.55

Printed on 27.02.2018

*Heper withholds the right to make modifications on
declared information without prior notice.

HPR Pazarlama A.Ş.

1. Organize Sanayi Bölgesi Uygurlar Cad. No:1 Sincan (06935), Ankara, Türkiye

T: +90 312 267 54 30 (pbx)

F: +90 312 267 54 31


E: info@heper.eu

W: www.heper.eu

heper⁺

REGIO

TECHNICAL SPECIFICATIONS

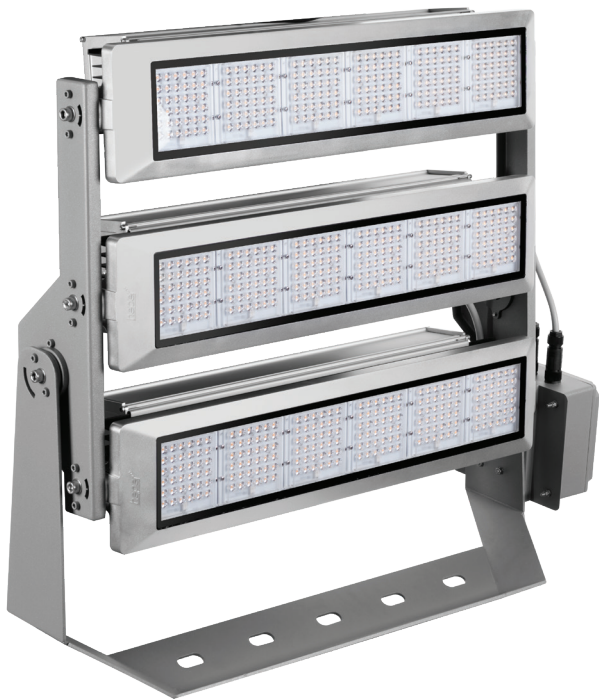

OPTICAL PROPERTIES


- 5 different beam angle options
- MacAdam Ellipse 3 chips
- Lumen Output: 95000 lm – 165000 lm
- Color Temperature: 4000K, 5700K
- CRI > 70(4000K) , CRI > 70(5700K)
- Lumen depreciation: L90B50 > 75600 h
- Efficacy: 118 lm/W (for 5700K, 700mA)

BODY HOUSING & FINISH

- Corrosion resistant aluminum housing
- Electrostatic powder coating
- HM1 to HM5 standard colors with optional RAL codes
- Ingress protection: IP66
- Impact protection: IK08

EXTRAS

- Higher CRI LED options (CRI>90, CRI>80)
- Programmable driver for different scenarios
- Different drive currents
- Marine grade coating

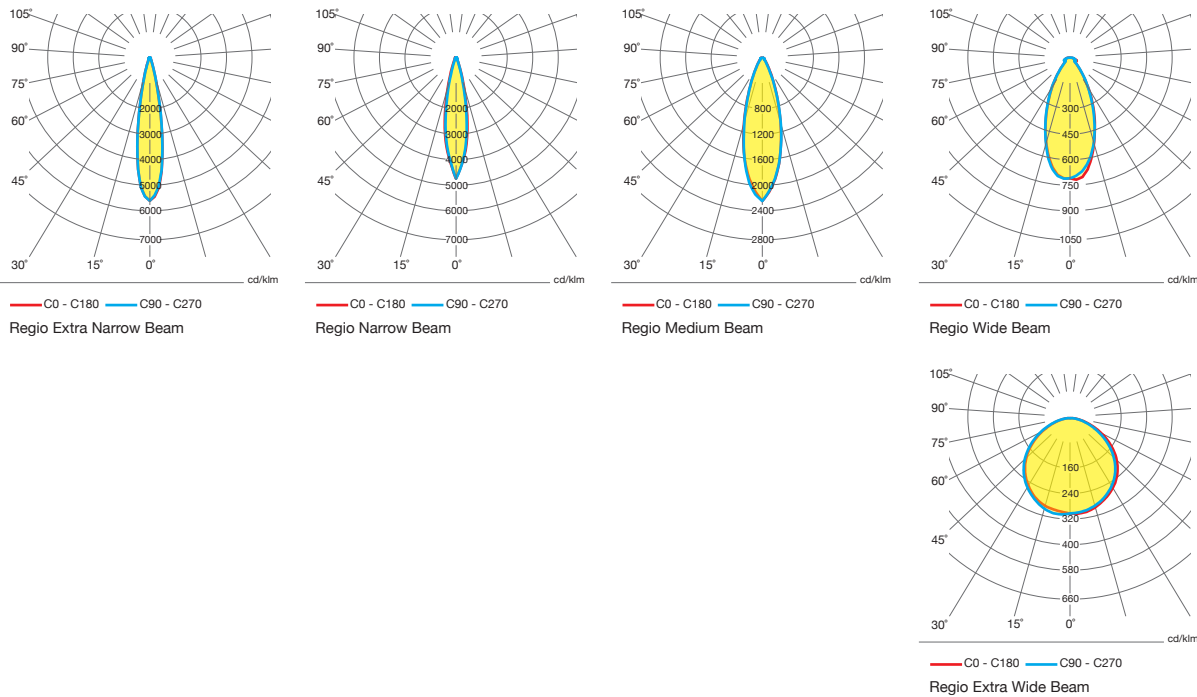

CE EN60598, IP66, IK08

APPLICATION AREAS


- Arenas
- Stadiums
- Fields

GENERAL HIGHLIGHTS

- Operating temperature: -40°C / +55°C
- Excellent thermal management with optimized PCB design
- Easy installation
- In compliance with EN 60598
- Tilt angle: +15° / -15° for each head and base
- Fixture integrated driver
- Different mount options

ELECTRICAL PROPERTIES

- Drive current: 350mA - 700mA
- Input Voltage: 220V-240V / 120V-277V at 50Hz / 60Hz
- Control type: On/Off, 1-10V, DALI, DMX
- Surge Protection: 6kV(optional)

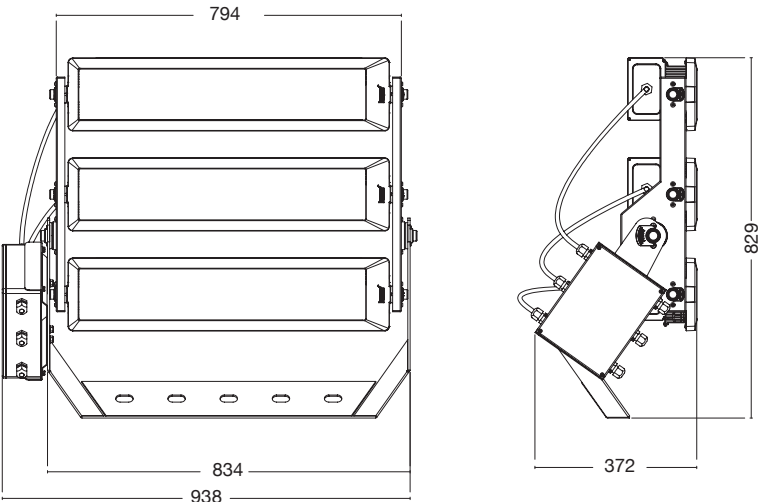

CODE	DESCRIPTION	CCT	DRIVE CURRENT	LUMEN OUTPUT	POWER
LF8032.518	Regio	4000K 5700K	700mA	145000 lm 165000 lm	1400W

Regio Weight: 21 kg

